








THE TECHNOLOGY SYSTEMS AND MONITORING







SAFE FILL 2,0000 Litres 5,280 US Gallons





Fue!

- GES innovative 2" mechanical overfill protection allowing fuel company to deliver at 160 gallons per minute flow rates right up to the safe fill level of the tank saving time and money on fuel company deliveries.
- Tank supplied as standard with 15 amp single phase 3 pin electrical cord connection to internal distribution board and isolation RCD's saving on onsite installations costs.
- Controlled operation prevents pump burnout when the fuel level gets too low
- Audible overfill alarms that indicate when the product is too high or too low
- Product-level temperature monitoring
- Emergency stop switches
- Pump bay fluorescent light

TUEL MANAGEMENT SYSTEM

- Tecalemit FMS 2000 user for the driver.

 vehicle management and reporting data
- German designed and manufactured Fuel
 Mangement Systems for each tank
- European developed technology with USB. 3G, and web cloud base options



ONLINE TANK MONITORING


- GES control ATG remote tank level access gauge via smartphone or web
- Low-level safety pump interlock
- Local Display (1-year free subscription)







DRAWING AND CERTIFICATIONS

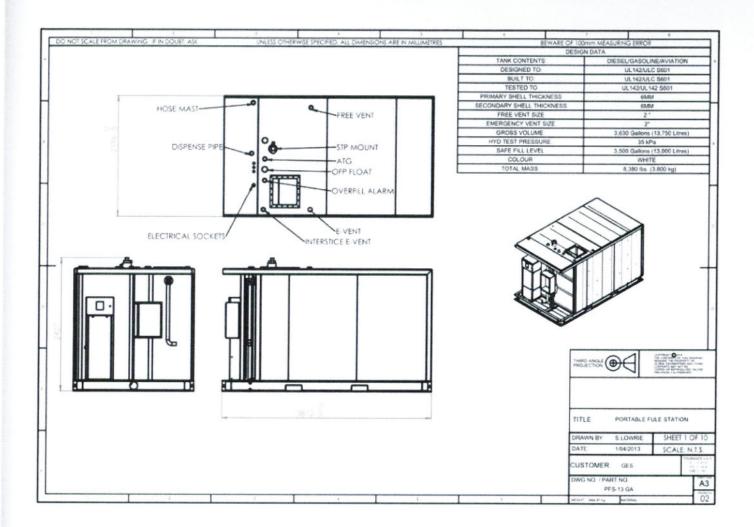

CERTIFICATIONS

- AS 1692-2006 Steel tanks for flammable and combustible liquids
- AS 1940-2004 Storage and handling of flammable and combustible liquids
- CAN/ULC-S601 Shop fabricated steel aboveground tanks for flammable and combustible liquids
- SANS 10131 Ed.1 (2004) Above-ground storage tanks for petroleum products
- **UL 142** Aboveground flammable liquid tanks

FOR MORE INFORMATION, PLEASE CONTACT

William Marr

bill@fuel.me

www.fuel.me

+1-708-870-5021 / +1-833-UFUELME










WHAT MAKES US DIFFERENT?

FEATURES AND BENEFITS



- 5,285 gallons safe fill package
- Large Capacity for up to 2000 users
- 10 year tank structural warranty 2 x 6 mm walls



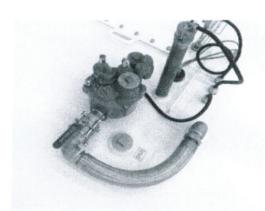

EASY CUSTOMER RECONCILIATION

*Saves you time and money for each transaction

O

- User Identification and Vehicle Identification
 - Odometer and engine hours
 - Time of filling and fuel quantity



- PUMP Single 1.5 HP submersible turbine ensures the product is always delivered to the dispenser via pressure vs suction so priming lines of an empty tank are not required
- **DISPENSER** comes with a fitted filter to prevent fuel containment
- GES dispenser with High or Low flow switch
- 10 meters retractable hi mast. 1° PR hose and auto nozzle

