EXHIBIT A

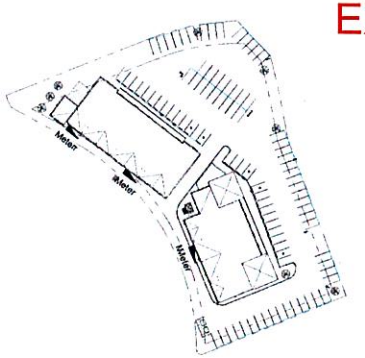

2 ARCHITECTURAL SITE PLAN - TRUE NORTH
1/64" = 1'-0"

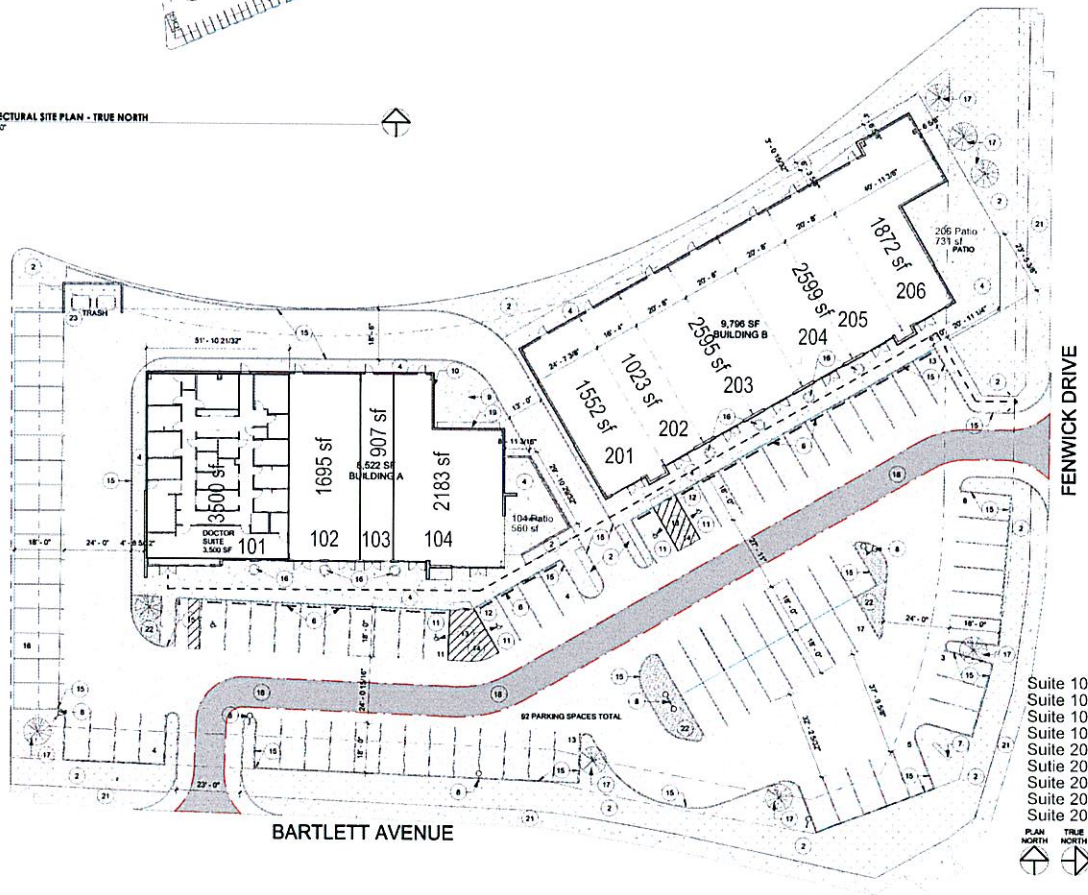

Suite 101 Eye Care of Laredo 3500 sqft
Suite 102 Reyes Dental 1695 sqft
Suite 103 Laredo Optical Co 907 sqft
Suite 104 Mulas 2183 sqft
Suite 201 Toastique 1552 sqft
Sutie 202 De La Fuente Insurance 1023 sqft
Suite 203 Honey by Nurse/Jett 2595 sqft
Suite 204/205 Laredo Medical Center 2599 sqft
Suite 206 Las Barricas 1872 sqft

1 ARCHITECTURAL SITE
1" = 20'-0"

SITE PLAN KEYNOTES

1. CONCRETE OR ASPHALT PAVING; RE: CIVIL.
2. LANDSCAPING
3. 4" WIDE PARKING STRIPES, PAINTED WHITE; RE: CIVIL.
4. CONCRETE SIDEWALK; CONTROL JOINT 10' O.C. OR AS REQUIRED BY CIVIL.
5. .
6. CONCRETE CAR STOP; RE: CIVIL.
7. PROPOSED MONUMENT SIGN; PROVIDE CONDUIT W/ POWER; RE: CIVIL AND MEP FOR POWER AND LIGHTING
8. LIGHT FIXTURE; RE: MEP
9. PROPOSED TRANSFORMER LOCATION;VERIFY W/AEP/MEP; RE: MEP
10. IRRIGATION SYS. LOCATION IN CLOSET; PROVIDE POWER.
11. ACCESSIBLE PARKING SPACE PER ACCESSIBILITY GUIDELINES.
12. ACCESSIBLE CURB RAMP PER ACCESSIBILITY GUIDELINES; RE: CIVIL
13. UNIVERSAL ACCESSIBLE PARKING SYMBOL PAINTED WHITE; RE: CIVIL.
14. 4" WIDE WHITE, 45° PAVEMENT MARKING, PAINTED STRIPES @ 18" O.C. AT ACCESSIBLE ROUTE; RE: CIVIL .
15. CONCRETE CURB; RE: CIVIL
16. WAUSAU MADE PLANTER TF 4124 W/ IRRIGATION SAGO PAL. & PERENNIALS
17. TREES
18. REFER TO CIVIL DRAEINGS FOR FIRE LANE
19. NEW BUILDING ELECTRICAL SERVICE EQUIPMENT; RE: MEP
20. PANEL-H LOCATION; RE MEP
21. SIDEWALK IN PUBLIC
22. R.O.W. DECOMPOSED GRANITE AND LANDSCAPING
23. TRASH ENCLOSURE; RE: CIVIL

PARKING COUNTS

PARKING COUNTS

Stall Type	Count	Property
9' x 18' - 90 deg	89	
9' x 18' - 90 deg ADA	4	
: 93		
Grand total: 93		

GENERAL SITE NOTES

1. REFER TO CIVIL PLANS FOR CONSTRUCTION INFORMATION. THIS PLAN IS FOR FOR REFERENCE ONLY.

2. CONTRACTOR SHALL VERIFY ALL EXISTING AND PROPOSED SITE ELEMENTS AND NOTIFY ARCHITECT OF ANY DISCREPANCIES SURVEY DATA OF EXISTING CONDITIONS WAS PROVIDED BY OTHERS.

3. CONTRACTOR SHALL LOCATE ALL EXISTING UNDERGROUND UTILITIES AND NOTIFY ARCHITECT OF ANY CONFLICT BEFORE CONSTRUCTION COMMENCE. CONTRACTOR SHALL EXERCISE CAUTION WHEN WORKING IN THE VICINITY OF UNDERGROUND UTILITIES.

LANDSCAPE NOTES

1.- CONTRACTOR SHALL VERIFY ALL EXISTING AND PROPOSED SITE ELEMENTS AND NOTIFY ARCHITECT OF ANY DISCREPANCIES. SURVEY DATA OF EXISTING CONDITIONS WAS SUPPLIED BY OTHERS.

2.- CONTRACTOR SHALL LOCATE ALL EXISTING UNDERGROUND UTILITIES AND NOTIFY ARCHITECT OF ANY CONFLICTS. CONTRACTOR SHALL EXERCISE CAUTION WHEN WORKING IN THE VICINITY OF UNDERGROUND UTILITIES.

3.- CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL REQUIRED LANDSCAPE AND IRRIGATION PERMITS.

4.- CONTRACTOR TO PROVIDE A MIN 2% SLOPE AWAY FROM STRUCTURE ON ALL SIDES.

5.- ALL PLANTING BEDS AND LAWN AREAS TO BE SEPARATED BY STEEL EDGING. NO STEEL NEED BE INSTALLED ADJACENT TO CURBS OR SIDEWALKS.

6.- ALL LANDSCAPE AREAS TO BE 100% IRRIGATED WITH AN UNDERGROUND AUTOMATIC IRRIGATION SYSTEM AND SHALL INCLUDE RAIN AND FREEZE SENSORS.

7.- ALL LAWN AREAS TO BE SOLID SOD BERMUDA GRASS, U.N.O.

8.- ALL IRRIGATION SYSTEM DESIGN AND INSTALLATION TO BE PERFORMED BY LICENSED INSTALLER IN THE STATE OF TEXAS.

9.- ALL LANDSCAPING TO COMPLY WITH THE MINIMUM REQUIREMENTS OF THE CITY OF LAREDO AND WITH THE CONDOMINIUM REGIME OF THE DEVELOPMENT.

10.- IRRIGATION TO ALL PLANTERS, TREES, TREE GRATES, & ALL GENERAL LANDSCAPING.

11.- PROVIDE UNDERLAYMENT FABRIC FOR ALL GRAVEL AREAS.

SOLID SOD NOTES

1. LEAVE GRADE AREAS TO RECEIVE TOPSOIL 3" BELOW FINAL DESIRED GRADE IN PLANTING AREAS AND 1" BELOW FINAL GRADE IN TURF AREAS

2. ADJUST SITE GRADING TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.

3. ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFE IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE.

4. CONTRACTOR TO COORDINATE AVAILABILITY OF EXISTING TOPSOIL.

5. PLANT SOD BY HAND TO COVER INDICATED AREA COMPLETELY. INSURE EDGES OF SOD ARE TOUCHING. TOP DRESS JOINTS BY HAND WITH TOPSOIL TO FILL VOIDS.

6. ROLL GRASS AREAS TO ACHIEVE A SMOOTH, EVEN SURFACE, FREE FROM UNNATURAL UNDULATIONS.

7. WATER SOD THOROUGHLY AS SOD OPERATION PROGRESSES.

8. CONTRACTOR SHALL MAINTAIN ALL LAWN AREAS UNTIL FINAL ACCEPTANCE. THIS SHALL INCLUDE, BUT NOT LIMITED TO THE FOLLOWING: MOWING, WATERING, WEEDING, CULTIVATING, CLEANING AND REPLACING DEAD OR BARE AREAS TO KEEP PLANTS IN A VIGOROUS, HEALTHY CONDITION.

9. CONTRACTOR SHALL GUARANTEE OWNER OF AN ACCEPTABLE TURF AREA AND SHALL PROVIDE REPLACEMENT FROM LOCAL SUPPLY IF NECESSARY.

MAINTENANCE NOTES

1. THE OWNER SHALL BE RESPONSIBLE FOR MAINTENANCE OF ALL LANDSCAPE.

2. ALL LANDSCAPE SHALL BE MAINTAINED IN A NEAT AND ORDERLY MANNER AT ALL TIMES. THIS SHALL INCLUDE MOWING, EDGING, PRUNING, FERTILIZING, WATERING, WEEDING AND OTHER SUCH ACTIVITIES COMMON TO LANDSCAPE MAINTENANCE.

3. ALL LANDSCAPE AREAS SHALL BE KEPT FREE OF TRASH, LITTER, WEEDS, AND OTHER SUCH MATERIAL OR PLANTS NOT PART OF THIS PLAN.

4. ALL PLANT MATERIAL SHALL BE MAINTAINED IN A HEALTHY AND GROWING CONDITION AS IS APPROPRIATE FOR THE SEASON OF THE YEAR.

5. ALL PLANT MATERIAL WHICH DIES SHALL BE REPLACED WITH PLANT MATERIAL OF EQUAL OR BETTER VALUE.

GENERAL LAWN NOTES

1. CONTRACTOR SHALL PROVIDE 2" OF IMPORTED TOPSOIL ON ALL AREAS TO RECEIVE LAWN

2. IMPORTED TOP SOIL SHALL BE NATURAL, FRIABLE SOIL FROM THE REGION, KNOW, AS BOTTOM LAND SOIL, FREE FROM LUMPS, CLAY, TOXIC SUBSTANCES, ROOTS, DEBRIS, VEGETATION, STONES, CONTAINING NO SALT AND BLACK TO BROWN IN COLOR.

3. ALL LAWN AREAS TO BE FINE GRADED. IRRIGATION TRENCHES COMPLETELY SETTLES, AND FINISH GRADE APPROVED PRIOR TO INSTALLATION.

4. ALL ROCKS 3/4" DIAMETER AND LARGER, DIRT CLODS, STICKS, CONCRETE SPOILS, ETC. SHALL BE REMOVED PRIOR TO PLACING TOPSOIL AND ANY LAWN INSTALLATION.

SITE PLAN LEGENDS

- ACCESSIBLE PATH
- FIRE LANE SHALL READ "NO PARKING FIRE LANE" EVERY 18'.
- LANDSCAPING BED
- SODDED AREA
- CONCRETE; RE: CIVIL
- DECOMPOSED GRANITE AND/OR P GRAVEL